


IRONWOOD CUT30 CROSS CUT SAW

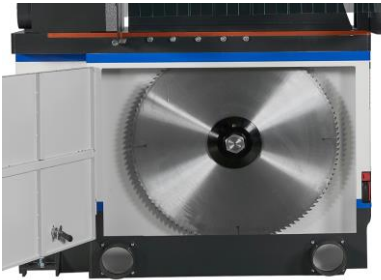

ADVANCED FEATURES

- Powerful, high torque 20 HP IE3 motor drive ensures high stability at fast cutting speeds
- Cutting capacities offer maximum thickness up to 10" and up to 26.75" width
- Foot pedal saw activation - hands-free operation
- Easily adjustable rise and fall rate
- Enhanced blade guarding for operator safety
- Blade access door interlock for safe blade changes
- Pre-drilled and tapped for TigerStop tables
- Available in plastics and metal configuration
- Optional equipment includes: dual hand controls, hydraulic cylinder upgrade, zero cutline back fence, side pressure clamp, machine tilt brackets, and infeed/outfeed tables.

The Ironwood CUT 30 Cut-off Saw offers operators a safe and reliable, compact crosscutting solution. The table surface of the CUT 30 saw is precision-ground to ensure absolute cutting accuracy while maintaining maximum stability during heavy cutting operations. The pneumatically-operated machine highlights enhanced safety guards, fast cutting speeds, and the powerful motor torque required when working with multiple material types and dimensions.

Technical Specifications	CUT30
Motor Horsepower (IE3)	15 HP IE
Blade Size	30" (762 mm)
Arbor Size	2" (50.8 mm)
Cutting Thickness Max	10" (254 mm)
Cutting Width Max	26.75" (680 mm)
Max Cycles per minute	15 CPM
Saw Speed	1600 RPM
Table Size	32.3" x 50.4" (820 x 1280 mm)
Working Table Height	34.25" (870 mm)
Dust Port Ø / CFM	2 x 4" (102mm) / 900 CFM
Air Pressure Required	80-90 PSI
Air Consumption	12 CFM @ 45 CPM
Machine Voltage	230V or 460V 3-Phase 60Hz.
Machine Amperage	230V: 35A 460V: 17.5A
Machine Weight	1240 lbs. (770 kg)
Packing Dimensions (mm)	1449 x 1092 x 1651
Machine base tilt	N/A



IRONWOOD

STILES | HC
A HOMAG COMPANY