



## For a wide spectrum in the material flow. Our **LOOPTEQ O-300**.

Whether handcraft or industrially oriented production. The LOOPTEQ O-300 transports the largest material variety and is indispensable for an economic workpiece return. It convinces by its high capacity and an especially gentle workpiece handling.

### The advantages at a glance

#### Fast amortization

pays off from 15 hours working time per week

#### Low quality costs

gentle workpiece handling with air cushion table

#### No training necessary

assemble the LOOPTEQ, connect it, and get started

#### Flexible operator organization

thanks to economic one-man operation

#### Ergonomic operation


operator will be released from heavy physical work



**Lifttable air cushion table for outfeed**  
(option)



**Small roller gib, lowerable**  
(option)

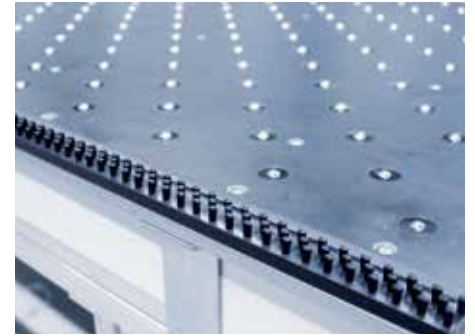

**Brake brushes for air cushion table**  
(option)



**Belt cleaning equipment**  
(option)



**Equipment to achieve CE-conformity:**  
rip cord back to the return belt




**Remote Service:** Excellent machine availability thanks to shorter periods of idle time and therefore lower production costs.

## A strong team.

**LOOPTEQ O-300 – Best suited for customers with high material variety - from small and light up to large and heavy workpieces.**

LOOPTEQ series' return conveyors perfectly harmonize in size, capacity, and speed with HOMAG unilateral edge banding machines. Hard- and software speak one language.

The result: A perfectly automated sizing and edge banding processing.

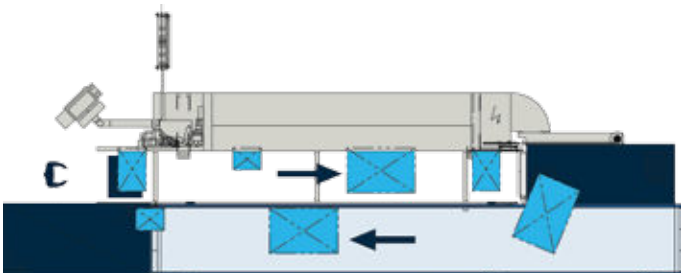

## Technical data

### Workpiece data

<b>Workpiece length</b>	300–2,500 mm	240–2,700 mm
<b>Workpiece width</b>	60–800 mm	60–1,000 mm
<b>Workpiece size</b>	4-sided processing*	
min. workpiece length	300 × 80 mm	240 × 80 mm
max. workpiece length	2,000 × 800 mm	2,500 × 1,000 mm
<b>Workpiece thickness</b>	8–60 mm	8–80 mm
<b>Workpiece weight</b>	max. 50 kg	max. 50 kg
<b>Mass per unit area</b>	max 20 kg/m <sup>2</sup>	max 20 kg/m <sup>2</sup>
<b>Working height</b>	820–980 mm	820–980 mm
<b>Feed speed</b>	8–30 m/min	8–30 m/min

\*Larger workpieces can be returned or even fed out at 4-sided processing with manual support during crosswise offset and turning.