

General Catalog



Presto LIFTS



The Presto **AIS** (Always In Stock) Program continues to be a key factor in our ability to take business away from competitors. New inventory systems and manufacturing processes ensure that our most popular products are Always In Stock and will ship in one week or less when you specify AIS on your purchase order. This will give you a real advantage over competitors who are quoting lead times of two weeks and up.

Qualifying Products Include:

- C62 & C74 Counterweight Stackers
- M152, M166, M452 & M466 Manual Stackers
- Rol-Lift® Standard Pallet Trucks
- XL36-20, XL36-30, XL36-40, XL36-50 & XL36-60 Scissor Lifts
- XS36-10 & XS36-15 Scissor Lifts
- XBP24-10, XBP24-15, XBP36-10 & XBP36-15 Portable Scissor Lifts

Even Presto products that aren't part of our Always In Stock Program have benefited from our new manufacturing practices. In fact, all standard products in our catalog are now available in four weeks or less! So, don't assume we can't meet your delivery date.

All Always In Stock items are highlighted throughout this price book. For more information, contact your Sales Coordinator.



Pallet Positioner

P3™ - Presto Pallet Positioner Load Leveler/Rotator

Model Number	Load Capacity	Raised Height	Lowered Height	Overall Base W / L	Turntable Diameter	Shipping Weight
Pallet Positioner						
P3	4500 lbs	30-1/2"	9-1/2"	36 x 48"	43-5/8"	615 lbs

Load and unload pallets without stooping, stretching, or walking

The P3 Presto Pallet Positioner automatically maintains pallets at a constant level and comfortable working height as layers of boxes are added or removed. Leveling is accomplished by a heavy-duty, reinforced rubber airbag that, once charged with shop air, can handle loads up to 4500 lbs. After airbag charging is complete, the P3 can be disconnected and moved to any location in the plant. Because the P3 is pneumatic, it can accommodate loads that vary substantially in weight (from 400 - 4500 lbs) so one unit is versatile enough to work in several areas.

The P3 - Presto Pallet Positioner features a turntable top with full 360° rotation. Anti-friction bearings for easy turning allow users to spin loads so they are always loading and unloading from the near side without having to walk around the unit.

Complete the system with a Presto Stacker for easy feeding and off-loading of the P3.



Available P3 Options:

- Plastic Cover: Keeps debris from falling through turntable
- Rotator Ring Disc Cover
- Solid Turntable Top: Accommodates small or odd-size pallets; Rectangular or Square Cover
- Ring Lock
- Bellows Guard: Prevents debris from collecting under unit

Presto P3's improve productivity and worker comfort in a wide variety of applications, including:

- Printing & Publishing**
- Graphic Arts**
- Metalworking**
- Woodworking**
- Machine Feeding or Off-loading**

Anywhere that pallet loads are built or broken down!

Accuload Positioner

Model Number	Load Capacity	Raised Height	Lowered Height	Overall Base W / L	Turntable Diameter	Shipping Weight
Accuload Series						
AL30	3000 lbs	30-1/4"	9-7/8"	24 x 48"	43"	500 lbs

Features

- 3000 lb holding capacity
- 1500 lb lifting capacity
- 21" vertical travel
- Foot control standard
- Optional pedestal control available
- Pressure relief valve standard
- 3/8" x 43" solid rotating platform
- Lifetime warranty on actuator
- Air requirements: 80 psi at 15 cfm
- Custom platforms available

Pneumatic options on page 30



Highlighted models are AIS (Always In Stock) and ship within one week.

Tel: 800-343-9322

Standard-Duty Scissor Lifts

Model Number	Load Capacity	Raised Height	Lowered Height	End/Side Capacity	Std. Base & Platform	Maximum Platform	Lifting Speed	Standard Motor	Std. Voltage/Phase/Hz	Shipping Weight
XL24 Series - 24" Travel										
XL24-20	2000 lbs	31"	7-1/4"	2000 lbs	24 x 36"	48 x 60"	15 sec	1 HP	115/1/60	550 lbs
XL24-40	4000 lbs	31"	7-1/4"	4000 lbs	24 x 36"	48 x 60"	27 sec	1 HP	115/1/60	570 lbs
XL24-60	6000 lbs	31"	7-1/4"	4500 lbs	24 x 36"	48 x 60"	40 sec	1 HP	115/1/60	620 lbs
XL36 Series - 36" Travel										
XL36-20	2000 lbs	43"	7-1/4"	2000 lbs	24 x 48"	48 x 72"	17 sec	1 HP	115/1/60	690 lbs
XL36-30	3000 lbs	43"	7-1/4"	3000 lbs	24 x 48"	48 x 72"	30 sec	1 HP	115/1/60	720 lbs
XL36-40	4000 lbs	43"	7-1/4"	3500 lbs	24 x 48"	48 x 72"	38 sec	1 HP	115/1/60	750 lbs
XL36-50	5000 lbs	43"	7-1/4"	3500 lbs	24 x 48"	48 x 72"	22 sec	1-1/2 HP	230, 460/3/60	770 lbs
XL36-60	6000 lbs	43"	7-1/4"	3500 lbs	24 x 48"	48 x 72"	30 sec	1-1/2 HP	230, 460/3/60	790 lbs
XL36-80	8000 lbs	45"	9"	4000 lbs	30 x 60"	54 x 84"	21 sec	3 HP	230, 460/3/60	1350 lbs
XL48 Series - 48" Travel										
XL48-20	2000 lbs	55"	7-1/4"	2000 lbs	24 x 64"	48 x 88"	19 sec	1-1/2 HP	230, 460/3/60	850 lbs
XL48-40	4000 lbs	55"	7-1/4"	3500 lbs	24 x 64"	48 x 88"	32 sec	1-1/2 HP	230, 460/3/60	900 lbs
XL48-60	6000 lbs	55"	7-1/4"	3500 lbs	24 x 64"	48 x 88"	39 sec	1-1/2 HP	230, 460/3/60	950 lbs
XL48-80	8000 lbs	57"	9"	4000 lbs	24 x 66"	48 x 96"	30 sec	3 HP	230, 460/3/60	1350 lbs
XL60 Series - 60" Travel										
XL60-20	2000 lbs	70"	10"	1000 lbs	24 x 86"	48 x 120"	10 sec	3 HP	230, 460/3/60	1300 lbs
XL60-40	4000 lbs	70"	10"	2000 lbs	24 x 86"	48 x 120"	20 sec	3 HP	230, 460/3/60	1375 lbs
XL60-60	6000 lbs	70"	10"	3000 lbs	24 x 86"	48 x 120"	30 sec	3 HP	230, 460/3/60	1450 lbs
XL60-80	8000 lbs	70"	10"	4000 lbs	24 x 86"	48 x 120"	42 sec	3 HP	230, 460/3/60	1700 lbs

Please specify voltage and control type when ordering.

Features

- Standard hand control pendant
- Optional foot control available
- Easy-to-access internal power unit
- Optional power units available
- Heavy-duty hydraulic cylinders with chrome-plated rams
- Polyurethane seals on cylinders
- 3-1/2" table edge to protect operator from rollers
- 3/4" steel plate scissor legs
- Lifetime lubricated bearings on all rollers and pivot points
- Maintenance device
- Custom designs available
- Oversized platforms available



Scissor lift options on page 25

Wide-Base Scissor Lifts

Wide-Base Scissor Lifts

Model Number	Load Capacity	Raised Height	Lowered Height	End/Side Capacity	Std. Base & Platform	Maximum Platform	Lifting Speed	Standard Motor	Std. Voltage/Phase/Hz	Shipping Weight
X3W Series - 24" Travel										
X3W24-20	2000 lbs	31"	7-3/4"	2000 lbs	36 x 36"	60 x 60"	30 sec	1 HP	115/1/60	720 lbs
X3W24-40	4000 lbs	31"	7-3/4"	4000 lbs	36 x 36"	60 x 60"	32 sec	1 HP	115/1/60	740 lbs
X3W24-60	6000 lbs	31"	7-3/4"	4500 lbs	36 x 36"	60 x 60"	34 sec	1 HP	115/1/60	790 lbs
X3W Series - 36" Travel										
X3W36-20	2000 lbs	43"	7-3/4"	2000 lbs	36 x 48"	60 x 72"	44 sec	1 HP	115/1/60	860 lbs
X3W36-40	4000 lbs	43"	7-3/4"	3500 lbs	36 x 48"	60 x 72"	46 sec	1 HP	115/1/60	900 lbs
X3W36-60	6000 lbs	43"	7-3/4"	3500 lbs	36 x 48"	60 x 72"	26 sec	1-1/2 HP	230, 460/3/60	960 lbs
X3W Series - 48" Travel										
X3W48-20	2000 lbs	55"	7-3/4"	2000 lbs	36 x 64"	60 x 88"	32 sec	1-1/2 HP	230, 460/3/60	1020 lbs
X3W48-40	4000 lbs	55"	7-3/4"	3500 lbs	36 x 64"	60 x 88"	34 sec	1-1/2 HP	230, 460/3/60	1070 lbs
X3W48-60	6000 lbs	55"	7-3/4"	3500 lbs	36 x 64"	60 x 88"	38 sec	1-1/2 HP	230, 460/3/60	1120 lbs
X4W Series - 24" Travel										
X4W24-20	2000 lbs	31"	7-3/4"	2000 lbs	48 x 36"	72 x 60"	30 sec	1 HP	115/1/60	810 lbs
X4W24-40	4000 lbs	31"	7-3/4"	4000 lbs	48 x 36"	72 x 60"	32 sec	1 HP	115/1/60	830 lbs
X4W24-60	6000 lbs	31"	7-3/4"	4500 lbs	48 x 36"	72 x 60"	34 sec	1 HP	115/1/60	880 lbs
X4W Series - 36" Travel										
X4W36-20	2000 lbs	43"	7-3/4"	2000 lbs	48 x 48"	72 x 72"	44 sec	1 HP	115/1/60	950 lbs
X4W36-40	4000 lbs	43"	7-3/4"	3500 lbs	48 x 48"	72 x 72"	46 sec	1 HP	115/1/60	990 lbs
X4W36-60	6000 lbs	43"	7-3/4"	3500 lbs	48 x 48"	72 x 72"	26 sec	1-1/2 HP	230, 460/3/60	1050 lbs
X4W Series - 48" Travel										
X4W48-20	2000 lbs	55"	7-3/4"	2000 lbs	48 x 64"	72 x 88"	32 sec	1-1/2 HP	230, 460/3/60	1110 lbs
X4W48-40	4000 lbs	55"	7-3/4"	3500 lbs	48 x 64"	72 x 88"	30 sec	1-1/2 HP	230, 460/3/60	1160 lbs
X4W48-60	6000 lbs	55"	7-3/4"	3500 lbs	48 x 64"	72 x 88"	38 sec	1-1/2 HP	230, 460/3/60	1250 lbs
X4W48-80	8000 lbs	57"	9"	4000 lbs	48 x 66"	72 x 88"	30 sec	3 HP	230, 460/3/60	1550 lbs
X4.5W Series - 60" Travel										
X4.5W60-20	2000 lbs	70"	10"	1000 lbs	54 x 86"	84 x 120"	10 sec	3 HP	230, 460/3/60	1650 lbs
X4.5W60-40	4000 lbs	70"	10"	2000 lbs	54 x 86"	84 x 120"	20 sec	3 HP	230, 460/3/60	1725 lbs
X4.5W60-60	6000 lbs	70"	10"	3000 lbs	54 x 86"	84 x 120"	30 sec	3 HP	230, 460/3/60	1800 lbs
X4.5W60-80	8000 lbs	70"	10"	4000 lbs	54 x 86"	84 x 120"	42 sec	3 HP	230, 460/3/60	2150 lbs

Please specify voltage and control type when ordering.

Features



- Standard hand control pendant
- Optional foot control available
- Easy-to-access internal power unit
- Optional power units available
- Heavy-duty hydraulic cylinders with chrome-plated rams
- Polyurethane seals on cylinders
- 3-1/2" table edge to protect operator from rollers
- 3/4" steel plate scissor legs
- Lifetime lubricated bearings on all rollers and pivot points
- Maintenance device
- Custom designs available
- Oversized platforms available

Scissor lift options on page 25

Tel: 800-343-9322

Tandem and Dual Scissor Lifts

Tandem Scissor Lifts

Model Number	Load Capacity	Raised Height	Lowered Height	Std. Base & Platform	Maximum Platform	Lifting Speed	Standard Motor	Std. Voltage/Phase/Hz	Shipping Weight
XL36T Series - 36" Travel									
XL36T-40	4000 lbs	43"	7-1/4"	24 x 96"	48 x 120"	34 sec	1 HP	115/1/60	1280 lbs
XL36T-80	8000 lbs	43"	7-1/4"	24 x 96"	48 x 120"	44 sec	1-1/2 HP	230, 460/3/60	1340 lbs
XL36T-120	12000 lbs	43"	7-1/4"	24 x 96"	48 x 120"	60 sec	1-1/2 HP	230, 460/3/60	1400 lbs
XL48T Series - 48" Travel									
XL48T-40	4000 lbs	55"	7-1/4"	24 x 128"	48 x 168"	28 sec	1-1/2 HP	230, 460/3/60	1600 lbs
XL48T-80	8000 lbs	55"	7-1/4"	24 x 128"	48 x 168"	64 sec	1-1/2 HP	230, 460/3/60	1700 lbs
XL48T-120	12000 lbs	55"	7-1/4"	24 x 128"	48 x 168"	78 sec	1-1/2 HP	230, 460/3/60	1800 lbs
XL60T Series - 60" Travel									
XL60T-40	4000 lbs	70"	10"	24 x 172"	48 x 204"	20 sec	3 HP	230, 460/3/60	2500 lbs
XL60T-80	8000 lbs	70"	10"	24 x 172"	48 x 204"	40 sec	3 HP	230, 460/3/60	2650 lbs
XL60T-120	12000 lbs	70"	10"	24 x 172"	48 x 204"	60 sec	3 HP	230, 460/3/60	2750 lbs

Features

- Upper travel limit switch and Lifting eyes included on all Tandem and Dual Scissor Lifts
- For platform sizes and capacities not shown above, please contact sales
- Application information must be reviewed for all Tandem Lifts. Approval drawings will be provided.



Wide Base Tandem Scissor Lifts

Model Number	Load Capacity	Raised Height	Lowered Height	Std. Base & Platform	Maximum Platform	Lifting Speed	Standard Motor	Std. Voltage/Phase/Hz	Shipping Weight
X3W36T Series - 36" Travel									
X3W36T-40	4000 lbs	43"	7-3/4"	36 x 96"	60 x 120"	48 sec	1-1/2 HP	230, 460/3/60	1620 lbs
X3W36T-80	8000 lbs	43"	7-3/4"	36 x 96"	60 x 120"	50 sec	1-1/2 HP	230, 460/3/60	1700 lbs
X3W36T-120	12000 lbs	43"	7-3/4"	36 x 96"	60 x 120"	52 sec	1-1/2 HP	230, 460/3/60	1820 lbs
X4W48T Series - 48" Travel									
X4W48T-40	4000 lbs	55"	7-3/4"	48 x 128"	72 x 168"	64 sec	1-1/2 HP	230, 460/3/60	2120 lbs
X4W48T-80	8000 lbs	55"	7-3/4"	48 x 128"	72 x 168"	68 sec	1-1/2 HP	230, 460/3/60	2220 lbs
X4W48T-120	12000 lbs	55"	7-3/4"	48 x 128"	72 x 168"	76 sec	1-1/2 HP	230, 460/3/60	2400 lbs
X4.5W60T Series - 60" Travel									
X4.5W60T-40	4000 lbs	70"	10"	54 x 172"	84 x 204"	20 sec	3 HP	230, 460/3/60	3200 lbs
X4.5W60T-80	8000 lbs	70"	10"	54 x 172"	84 x 204"	40 sec	3 HP	230, 460/3/60	3350 lbs
X4.5W60T-120	12000 lbs	70"	10"	54 x 172"	84 x 204"	60 sec	3 HP	230, 460/3/60	3500 lbs

Dual Scissor Lifts

Model Number	Load Capacity	Raised Height	Lowered Height	Std. Base & Platform	Maximum Platform	Lifting Speed	Standard Motor	Std. Voltage/Phase/Hz	Shipping Weight
XL36D Series - 36" Travel									
XL36D-40	4000 lbs	43"	7-1/4"	48 x 48"	72 x 72"	34 sec	1 HP	115/1/60	1280 lbs
XL36D-80	8000 lbs	43"	7-1/4"	48 x 48"	72 x 72"	44 sec	1-1/2 HP	230, 460/3/60	1340 lbs
XL36D-120	12000 lbs	43"	7-1/4"	48 x 48"	72 x 72"	60 sec	1-1/2 HP	230, 460/3/60	1400 lbs
XL48D Series - 48" Travel									
XL48D-40	4000 lbs	55"	7-1/4"	48 x 64"	72 x 96"	64 sec	1-1/2 HP	230, 460/3/60	1600 lbs
XL48D-80	8000 lbs	55"	7-1/4"	48 x 64"	72 x 96"	72 sec	1-1/2 HP	230, 460/3/60	1700 lbs
XL48D-120	12000 lbs	55"	7-1/4"	48 x 64"	72 x 96"	78 sec	1-1/2 HP	230, 460/3/60	1800 lbs
XL60D Series - 36" Travel									
XL60D-40	4000 lbs	70"	10"	48 x 86"	72 x 120"	20 sec	3 HP	230, 460/3/60	2500 lbs
XL60D-80	8000 lbs	70"	10"	48 x 86"	72 x 120"	40 sec	3 HP	230, 460/3/60	2650 lbs
XL60D-120	12000 lbs	70"	10"	48 x 86"	72 x 120"	60 sec	3 HP	230, 460/3/60	2750 lbs



Scissor lift options on page 25

Light-Duty Scissor Lifts

Light-Duty Manual Scissor Lifts

Model Number	Load Capacity	Raised Height	Lowered Height	End/Side Capacity	Std. Base & Platform	Maximum Platform	Lifting Strokes	Shipping Weight
XF24 Series								
XF24-10	1000 lbs	29"	5-1/4"	1000 lbs	24 x 36"	36 x 42"	35	390 lbs
XF24-15	1500 lbs	29"	5-1/4"	1500 lbs	24 x 36"	36 x 42"	55	395 lbs
XF24-20	2000 lbs	31"	7-1/4"	2000 lbs	24 x 36"	48 x 60"	85	500 lbs
XF36 Series								
XF36-10	1000 lbs	41"	5-1/4"	1000 lbs	24 x 48"	36 x 54"	46	440 lbs
XF36-15	1500 lbs	41"	5-1/4"	1500 lbs	24 x 48"	36 x 54"	69	455 lbs
XF36-20	2000 lbs	43"	7-1/4"	2000 lbs	24 x 48"	48 x 72"	130	650 lbs
WXF24 Series								
WXF24-10	1000 lbs	29-1/4"	5-1/4"	1000 lbs	36 x 36"	48 x 42"	35	430 lbs
WXF24-15	1500 lbs	29-1/4"	5-1/4"	1500 lbs	36 x 36"	48 x 42"	55	435 lbs
WXF36 Series								
WXF36-10	1000 lbs	41-1/4"	5-1/4"	1000 lbs	36 x 48"	48 x 54"	46	480 lbs
WXF36-15	1500 lbs	41-1/4"	5-1/4"	1500 lbs	36 x 48"	48 x 54"	69	485 lbs



XF36-10 Shown

Features

- Foot-operated hydraulic pump provides lift
- Hand-controlled release for lowering
- 1/2" steel plate scissor legs
- 2000 lb capacity models feature 3/4" thick steel scissor legs
- Wide-base models
- Oversized & custom platforms available
- Hinged platform allows easy access to cylinders
- Chrome-plated ram cylinders
- Custom designs available

Light-Duty Electric Scissor Lifts

Model Number	Load Capacity	Raised Height	Lowered Height	End/Side Capacity	Std. Base & Platform	Maximum Platform	Lifting Speed	Shipping Weight
XS24 Series - 24" Travel - 24" W x 36" L Platform								
XS24-10	1000 lbs	29"	5-1/4"	1000 lbs	24 x 36"	36 x 48"	18 sec	390 lbs
XS24-15	1500 lbs	29"	5-1/4"	1500 lbs	24 x 36"	36 x 48"	23 sec	395 lbs
XS36 Series - 36" Travel - 24" W x 48" L Platform								
XS36-10	1000 lbs	41"	5-1/4"	1000 lbs	24 x 48"	36 x 60"	29 sec	425 lbs
XS36-15	1500 lbs	41"	5-1/4"	1500 lbs	24 x 48"	36 x 60"	36 sec	430 lbs
WXS24 Series - 24" Travel - 36" W x 36" L Platform								
WXS24-10	1000 lbs	29-1/4"	5-1/4"	1000 lbs	36 x 36"	48 x 48"	18 sec	430 lbs
WXS24-15	1500 lbs	29-1/4"	5-1/4"	1500 lbs	36 x 36"	48 x 48"	23 sec	435 lbs
WXS36 Series - 36" Travel - 36" W x 48" L Platform								
WXS36-10	1000 lbs	41-1/4"	5-1/4"	1000 lbs	36 x 48"	48 x 60"	29 sec	455 lbs
WXS36-15	1500 lbs	41-1/4"	5-1/4"	1500 lbs	36 x 48"	48 x 60"	36 sec	470 lbs

Features

- Standard hand-control pendant
- Easy-to-service internal power unit
- 1/2" steel plate scissor legs
- Powered up, powered down units
- Hinged platform allows for easy access to cylinders
- Internal 1/3 HP 115/1/60 power unit
- Custom designs available

Scissor lift options on page 25



XS36-15 Shown

Highlighted models are AIS (Always In Stock) and ship within one week.

Tel: 800-343-9322

Portable Scissor Lifts

Portable Manual Scissor Lifts

Model Number	Load Capacity	Raised Height	Lowered Height	Standard Platform	Maximum Platform	Lifting Strokes	Shipping Weight
XP24 Series - 23" Travel							
XP24-300	300 lbs	33"	10"	20 x 32"	20 x 32"	12	250 lbs
XP24-600	600 lbs	33"	10"	20 x 32"	20 x 32"	25	260 lbs
XP24 Series - 24" Travel							
XP24-10	1000 lbs	33"	9-1/4"	24 x 36"	30 x 42"	35	410 lbs
XP24-15	1500 lbs	33"	9-1/4"	24 x 36"	30 x 42"	55	415 lbs
XP24-20	2000 lbs	41-1/2"	17-1/2"	24 x 36"	48 x 48"	85	750 lbs
XP36 Series - 36" Travel							
XP36-10	1000 lbs	45"	9-1/4"	24 x 48"	30 x 54"	46	440 lbs
XP36-15	1500 lbs	45"	9-1/4"	24 x 48"	30 x 54"	69	445 lbs
XP36-20	2000 lbs	53-1/2"	17-1/2"	24 x 48"	48 x 60"	130	860 lbs
WXP24 Series - 24" Travel							
WXP24-10	1000 lbs	33-1/4"	9-1/4"	36 x 36"	42 x 42"	35	450 lbs
WXP24-15	1500 lbs	33-1/4"	9-1/4"	36 x 36"	42 x 42"	55	455 lbs
WXP36 Series - 36" Travel							
WXP36-10	1000 lbs	45-1/4"	9-1/4"	36 x 48"	48 x 54"	46	480 lbs
WXP36-15	1500 lbs	45-1/4"	9-1/4"	36 x 48"	48 x 54"	69	485 lbs



XP24-600



Features

- Hand-release for lowering
- Foot-operated hydraulic pump
- 1/2" steel plate scissor legs
- 2000 lb capacity models feature 3/4" thick steel scissor legs
- Two fixed & two swivel 5" x 2" high-impact phenolic casters
- XP24-20, XP36-20, XBP24-20 & XBP36-20 have 6" casters
- Hinged platform allows for access to cylinders
- Foot-operated floor lock
- Oversized and custom platforms available
- Optional casters available

Portable Electric Scissor Lifts

Model Number	Load Capacity	Raised Height	Lowered Height	End/Side Capacity	Std. Base & Platform	Maximum Platform	Lifting Speed	Shipping Weight
XS24 Series - 24" Travel - 24" W x 36" L Platform								
XBP24-10	1000 lbs	33"	9-1/4"	1000 lbs	24 x 36"	30 x 42"	10 sec	470 lbs
XBP24-15	1500 lbs	33"	9-1/4"	1500 lbs	24 x 36"	30 x 42"	15 sec	475 lbs
XBP24-20	2000 lbs	41-1/2"	17-1/2"	2000 lbs	24 x 36"	48 x 48"	15 sec	700 lbs
XS36 Series - 36" Travel - 24" W x 48" L Platform								
XBP36-10	1000 lbs	45"	9-1/4"	1000 lbs	24 x 48"	30 x 54"	14 sec	500 lbs
XBP36-15	1500 lbs	45"	9-1/4"	1500 lbs	24 x 48"	30 x 54"	20 sec	505 lbs
XBP36-20	2000 lbs	53-1/2"	17-1/2"	2000 lbs	24 x 48"	48 x 60"	22 sec	700 lbs
WXS24 Series - 24" Travel - 36" W x 36" L Platform								
WBP24-10	1000 lbs	33-1/4"	9-1/4"	1000 lbs	36 x 36"	42 x 42"	8 sec	460 lbs
WBP24-15	1500 lbs	33-1/4"	9-1/4"	1500 lbs	36 x 36"	42 x 42"	15 sec	465 lbs
WXS36 Series - 36" Travel - 36" W x 48" L Platform								
WBP36-10	1000 lbs	45-1/4"	9-1/4"	1000 lbs	36 x 48"	48 x 54"	14 sec	490 lbs
WBP36-15	1500 lbs	45-1/4"	9-1/4"	1500 lbs	36 x 48"	48 x 54"	20 sec	495 lbs



Features

- Oversized platforms available
- Two fixed & two swivel 5" x 2" high-impact phenolic casters
- Easy-to-service internal power unit
- 1/2" steel plate scissor legs
- 12V AGM cell battery
- Built-in 5 amp battery charger
- Optional power units available
- Hinged platform allows for easy access to cylinders and power unit
- Foot-operated safety floor lock
- Powered up, powered down
- Custom designs available

Scissor lift options on page 25

Fax: 888-788-6496

Highlighted models are AIS (Always In Stock) and ship within one week.

Presto LIFTS

Double Scissor Lifts

Compact Scissor Lifts



Model Number	Load Capacity	Raised Height	Lowered Height	Std. Base & Platform	Maximum Platform	Rise Time	Standard Motor	Std. Voltage/Phase/Hz	Shipping Weight
DXS30 Series - 30" Travel									
DXS30-5	500 lbs	36-3/4"	6-3/4"	16 x 24"	30 x 36"	16 sec	1/3 HP	115/1/60	350 lbs
DXS30-10	1000 lbs	36-3/4"	6-3/4"	16 x 24"	30 x 36"	18 sec	1/3 HP	115/1/60	360 lbs
DXS36 Series - 36" Travel									
DXS36-10	1000 lbs	43-1/2"	7-1/2"	24 x 36"	36 x 48"	40 sec	1/2 HP	115/1/60	460 lbs
DXS36-15	1500 lbs	43-1/2"	7-1/2"	24 x 36"	36 x 48"	42 sec	1/2 HP	115/1/60	480 lbs
DXS36-20	2000 lbs	44-1/4"	6"	18 x 42" *	36 x 54"	40 sec	1/2 HP	115/1/60	550 lbs
DXS48 Series - 48" Travel									
DXS48-10	1000 lbs	55-1/2"	7-1/2"	24 x 48"	36 x 60"	50 sec	1/2 HP	115/1/60	600 lbs
DXS48-15	1500 lbs	55-1/2"	7-1/2"	24 x 48"	36 x 60"	54 sec	1/2 HP	115/1/60	650 lbs
DXS48-20	2000 lbs	57-1/2"	9-1/2"	24 x 40"	36 x 54"	42 sec	1 HP	115/1/60	800 lbs
DXS48-40	4000 lbs	60"	12"	30 x 42"	48 x 60"	16 sec	3 HP	230, 460/3/60	1250 lbs
DXS60 Series - 60" Travel									
DXS60-20	2000 lbs	72-1/2"	12-1/2"	24 x 53"	42 x 66"	16 sec	3 HP	230, 460/3/60	1100 lbs
DXS60-40	4000 lbs	74"	14"	30 x 53"	48 x 66"	30 sec	3 HP	230, 460/3/60	1800 lbs
DXS72 Series - 72" Travel									
DXS72-20	2000 lbs	84-1/2"	12-1/2"	24 x 53"	36 x 66"	92 sec	1 HP	115/1/60	1250 lbs
DXS72-40	4000 lbs	86"	14"	32 x 57"	54 x 72"	36 sec	3 HP	230, 460/3/60	2000 lbs

Features

- 500 - 2000 lb capacities
- 30", 36", 48", & 60" vertical travel
- Standard hand pendant control
- Optional power units available
- **DXS36-20 is available with a minimum base/platform size of 18x32" (requires optional remote power unit)**
- DXS30 features power up, power down cylinders
- All other models are power up, gravity down
- Hinged platform allows for easy access to cylinders and power unit in the collapsed position
- Custom designs available
- For higher vertical travel and greater capacity, contact Sales

Portable Double Scissor Lifts

Model Number	Load Capacity	Raised Height	Lowered Height	Standard Platform	Maximum Platform	Lifting Strokes	Shipping Weight
DBP30 Series - 30" Travel - 24" W x 24" L Platform							
DBP30-10	1000 lbs	40-3/4"	10-3/4"	24 x 24"	30 x 30"	8 sec	470 lbs
DBP36 Series - 36" Travel - 24" W x 36" L Platform							
DBP36-10	1000 lbs	47-3/4"	11-3/4"	24 x 36"	30 x 42"	14 sec	505 lbs
DBP36-15	1500 lbs	47-3/4"	11-3/4"	24 x 36"	30 x 42"	20 sec	515 lbs
DBP48 Series - 48" Travel - 24" W x 48" L Platform							
DBP48-10	1000 lbs	59-3/4"	11-3/4"	24 x 48"	30 x 54"	43 sec	650 lbs
DBP48-15	1500 lbs	59-5/8"	11-5/8"	24 x 48"	30 x 54"	43 sec	700 lbs

Features

- 1000 - 1500 lb capacity
- 30", 36", & 48" vertical travel
- Foot-operated floor lock
- Hinged platform allows for easy access to cylinders and power unit
- Two fixed & two swivel 5" x 2" high-impact phenolic casters
- 12V AGM battery
- Built-in 5 amp battery charger
- DBP36-10/-15, DBP48-10/-15 powered up, gravity down
- Oversized platforms available
- Optional power units available
- Custom designs available



Scissor lift options on page 25

Tel: 800-343-9322

Post Lift Tables

Post Lift Tables

Model Number	Load Capacity	Raised Height	Lowered Height	Platform Size	Shipping Weight
P18 Series - Foot-operated Tables					
P18-10	1000 lbs	49"	31"	20 x 30"	290 lbs
P18-20	2000 lbs	49"	31"	24 x 36"	300 lbs
P18-30	3000 lbs	49"	31"	24 x 36"	315 lbs
P12 Series - Foot-operated Tables					
P12-10	1000 lbs	37"	25"	20 x 30"	240 lbs
P12-20	2000 lbs	37"	25"	24 x 36"	250 lbs
P12-30	3000 lbs	37"	25"	24 x 36"	260 lbs
BP18 Series - Battery-operated Tables					
BP18-10	1000 lbs	52"	34"	20 x 30"	370 lbs
BP18-20	2000 lbs	52"	34"	24 x 36"	430 lbs
BP12 Series - Battery-operated Tables					
BP12-10	1000 lbs	37"	25"	20 x 30"	270 lbs
BP12-20	2000 lbs	37"	25"	24 x 36"	310 lbs



Features

- 1000 - 3000 lb capacities
- Foot-operated hydraulic pump on P series
- 12V DC screw drive linear actuator on BP series
- Foot-operated floor lock
- Push-button control on BP series
- Integrated push/pull handle
- 2 fixed and 2 swivel casters with high-impact polyurethane wheels



Mechanical Post Lift Tables

Model Number	Load Capacity	Raised Height	Lowered Height	Platform Size	Shipping Weight
P Series					
P2436	2000 lbs	42"	24"	24 X 36"	400 lbs
P2448	2000 lbs	42"	24"	24 X 48"	460 lbs
P3036	2000 lbs	42"	24"	30 X 36"	445 lbs
P3060	2000 lbs	42"	24"	30 X 60"	600 lbs

Features

- 2000 lb capacities
- 42" raised height
- Four self-locking acme screw posts
- Two-speed crank shaft for raising & lowering
- Foot-operated floor lock
- 2 fixed and 2 swivel casters with high-impact polyurethane wheels

Hydraulic Cantilever Tables

Model Number	Load Capacity	Raised Height	Lowered Height	Platform Size	Shipping Weight
PL Series					
PL36	2000 lbs	36"	24"	24 x 36"	315 lbs
PL48	2000 lbs	48"	30"	24 x 36"	330 lbs
PL60	2000 lbs	60"	36"	24 x 36"	350 lbs

Features

- 2000 lb capacities
- Dual floor locks
- Raised heights up to 60"
- Lowered heights down to 24"
- 2 fixed and 2 swivel casters with high-impact phenolic wheels
- Foot-operated hydraulic pump
- Tip-toe release for lowering




Floor Level Access

Floor Level Lift & Tilt



Model Number	Load Capacity	Raised Height	Lowered Height	Degree of Tilt	Dimensions W x L	Platform Size	Lifting Speed	Shipping Weight
XZT44 Series								
XZT44-20	2000 lbs	33-3/8"	3/8"	30°	68 x 61"	44 x 48"	39 sec	1255 lbs
XZT44-40	4000 lbs	33-1/2"	1/2"	30°	68 x 61"	44 x 48"	43 sec	1420 lbs
XZT50 Series								
XZT50-20	2000 lbs	33-3/8"	3/8"	30°	74 x 61"	50 x 48"	40 sec	1420 lbs
XZT50-40	4000 lbs	33-1/2"	1/2"	30°	74 x 61"	50 x 48"	44 sec	1505 lbs

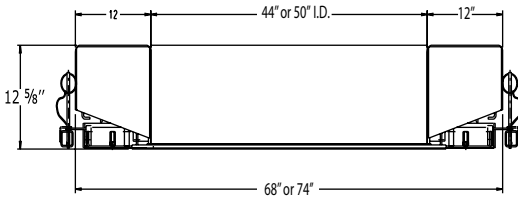

Features

- 2000 - 4000 lb capacity
- 33" vertical travel
- 30° tilt
- Standard pedestal control
- Optional foot control available
- External 1 HP 115/1/60 power unit
- Optional power units available
- Floor level lowered height
- No ramps or pit required
- Custom designs available
- One power unit controls lift & tilt
- 3-phase available

Floor Level Container Tilters


Model Number	Tilt Capacity	Lowered Height	Degree of Tilt	Dimensions W x L	Platform Size	Lifting Speed	Shipping Weight
ZRT Series							
ZRT50-20	2000 lbs	3/8"	89°	59 x 67"	50 x 48"	26 sec	1245 lbs
ZRT50-40	4000 lbs	3/8"	89°	59 x 67"	50 x 48"	28 sec	1295 lbs



Features

- 2000 - 4000 lb capacity
- 89° tilt
- Custom platform sizes
- Internal 1 HP 115/1/60 power unit
- Floor level at lowered height
- Pallet jack accessible
- Optional power units available
- 6" flexible safety toe guard
- Hand-control with magnetic back
- Custom designs available
- 50" I.D. x 30-1/8" side height

Floor Level Tilters

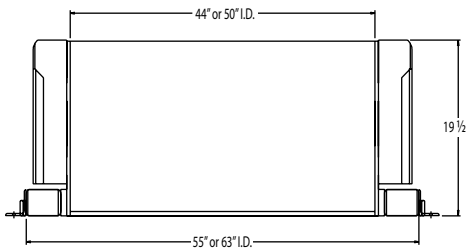

Model Number	Tilt Capacity	Lowered Height	Degree of Tilt	Dimensions W x L	Platform Size	Lifting Speed	Shipping Weight
TZ44 Series							
TZ44-20	2000 lbs	3/8"	45°	55 x 60-1/2"	44 x 48"	30 sec	1200 lbs
TZ44-40	4000 lbs	3/8"	45°	55 x 60-1/2"	44 x 48"	32 sec	1155 lbs
TZ44-60	6000 lbs	1/2"	45°	55 x 60-1/2"	44 x 48"	36 sec	1235 lbs
TZ50 Series							
TZ50-20	2000 lbs	3/8"	45°	63 x 60-1/2"	50 x 48"	30 sec	1215 lbs
TZ50-40	4000 lbs	3/8"	45°	63 x 60-1/2"	50 x 48"	34 sec	1240 lbs
TZ50-60	6000 lbs	1/2"	45°	63 x 60-1/2"	50 x 48"	38 sec	1340 lbs



Features

- 2000 - 4000 lb capacity
- 45° tilt
- Two standard platform sizes
- Floor level at lowered height
- Pallet jack accessible
- External 1 HP 115/1/60 power unit
- Optional power units available
- Hand-control with magnetic back
- 6" flexible safety toe guard
- Custom designs available

Tilt table options on page 25

Tel: 800-343-9322

Floor-Level Lifts

Floor-Level Lifts

Model Number	Load Capacity	Raised Height	Lowered Height	Platform Size	Dimensions W / L	Lifting Speed	Shipping Weight
XZ44 Series							
XZ44-20	2000 lbs	35-3/8"	3/8"	44 x 48"	61-1/4 x 59"	40 sec	1300 lbs
XZ44-40	4000 lbs	35-3/8"	3/8"	44 x 48"	61-1/4 x 59"	44 sec	1325 lbs
XZ44-60	6000 lbs	35-3/8"	1/2"	44 x 48"	61-1/4 x 59"	54 sec	1750 lbs
XZ50 Series							
XZ50-20	2000 lbs	35-3/8"	3/8"	50 x 48"	67-1/4 x 59"	40 sec	1400 lbs
XZ50-40	4000 lbs	35-3/8"	3/8"	50 x 48"	67-1/4 x 59"	44 sec	1425 lbs
XZ50-60	6000 lbs	35-3/8"	1/2"	50 x 48"	67-1/4 x 59"	54 sec	1850 lbs

Features

- 2000 - 6000 lb capacities
- 35" vertical travel
- Two standard platform sizes
- External 1 HP 115/1/60 power unit
- Optional power units available
- Foot or hand-held control
- Floor-level at lowered height, pallet truck accessible
- 6" flexible safety toe guard
- Lifting eyes for safe positioning
- Custom designs available



P4 Floor-Level Loaders

Model Number	Load Capacity	Raised Height	Lowered Height	Platform Size	Dimensions W / L	Lifting Speed	Standard Motor	Std. Voltage/Phase/Hz	Shipping Weight
P4 Series									
P4-25-4448	2500 lbs	28"	3/8"	44 x 48"	51 x 61"	22 sec	1 HP	115/1/60	1485 lbs
P4-25-5248	2500 lbs	28"	3/8"	52 x 48"	59 x 61"	22 sec	1 HP	115/1/60	1620 lbs
P4-40-4448	4000 lbs	28"	3/8"	44 x 48"	51 x 61"	30 sec	1 HP	115/1/60	1650 lbs
P4-40-5248	4000 lbs	28"	3/8"	52 x 48"	59 x 61"	30 sec	1 HP	115/1/60	1800 lbs

Features

- Lowers to floor height so load can be loaded on or off with a hand pallet truck
- Foot switch allows operator to adjust the height of the pallet for loading/unloading at the most convenient working height with minimum reaching or lifting
- Easy and safe pallet loading with narrow side panels to provide operator protection
- Easily moved with a hand pallet jack
- Photoelectric toe guard
- 10 foot control cord pre-wired
- Other voltages available
- Other platform sizes available, please contact Sales.

Any of the following controls may be specified at no additional cost:

- NEMA 1, up/down, footswitch with cover and 10 foot control cord
- NEMA 4, up/down, hand-held push-button control with magnet and 10 foot coil cord

All standard P4s are shipped with the following:

- Internally mounted power unit
- Reservoir filled with hydraulic oil



Tilt table options on page 25

Lift & Tilt Tables

Scissor Lift & Tilt

Model Number	Load Capacity	Raised Height	Lowered Height	Degree of Tilt	Standard Base	Maximum Platform	Lifting Speed	Tilting Speed	Shipping Weight
X3WT Series									
X3WT36-20	2000 lbs	47-1/2"	11-1/2"	30°/45°	36 x 48"	60 x 60"	42 sec	8 sec	1370 lbs
X3WT36-40	4000 lbs	47-1/2"	11-1/2"	30°/45°	36 x 48"	60 x 60"	43 sec	8 sec	1420 lbs
X4WT Series									
X4WT36-20	2000 lbs	47-1/2"	11-1/2"	30°/45°	48 x 48"	72 x 60"	42 sec	8 sec	1450 lbs
X4WT36-40	4000 lbs	47-1/2"	11-1/2"	30°/45°	48 x 48"	72 x 60"	43 sec	8 sec	1500 lbs
XLT Series									
XLT36-10	1000 lbs	49-3/4"	13-3/4"	30°/45°	24 x 48"	48 x 48"	20 sec	15 sec	1000 lbs
XLT36-20	2000 lbs	50-3/4"	14-3/4"	30°/45°	24 x 48"	50 x 50"	30 sec	15 sec	1100 lbs
XLT36-40	4000 lbs	50-3/4"	14-3/4"	30°/45°	24 x 48"	50 x 50"	44 sec	15 sec	1350 lbs



Model X3WT shown with standard pedestal control

X3WT and X4WT standard features:

- Independent lift & tilt functions
- 11-1/2" lowered height
- One power unit for both lift & tilt functions
- Internal 1 HP 115/1/60 power unit
- Standard pedestal controls
- Optional dual foot or dual hand controls available
- Above models feature 30° & 45° tilt (please specify when ordering)

XLT Series standard features:

- Independent lift & tilt functions
- Lift Power: Internal 1 HP 115/1/60 power unit
- Tilt Power: Internal 1 HP 115/1/60 power unit (1000 lb capacity model features 1/3 HP)
- Standard dual hand or dual foot controls (please specify when ordering)
- Optional pedestal controls available
- Standard 30° or 45° of tilt (please specify when ordering)
- For 60° and 90° tilt models and for higher capacities, contact Sales

Lift & Tilt tables are a great product to prevent excessive bending and reaching into containers. For Lift & Tilt applications however, it is always important to know the size of the load, including height, to help determine the load center of gravity as it moves through the tilt application. Please contact your sales coordinator when considering a Lift & Tilt unit for your customer's application.

Hydraulic Lift Options

Mechanical Options

Electrical & Hydraulic Options

Description and Specification
Oversized Platform - platforms can be increased in width and length up to an additional 24". Side- and end-load capacities are de-rated 2% per inch of increase. Oversized models must be lagged to the floor. <i>Tandem and Dual Series Lift Tables</i>
Turntables - See Page 26 <i>Available free-standing, mounted to a stand, or installed on a scissor lift.</i>
Gravity Conveyor Top - for straight-line movement of work loads. Available with 1-9/10" and 2-1/2" diameter steel rollers. Specify roller centers. This option adds either 3-3/4" or 4-3/8" to the lowered and raised elevations.
Ball Transfer Top - for multi-directional movement of work loads. Available with 1" diameter steel ball casters. Specify ball centers. This option adds either 2-3/4" or 3-3/4" to the lowered and raised elevations.
Fixed End & Side Rails - mounted to lift platform or conveyor section. Specify rail height.
Optional Platforms & Overlay Material - for special handling of loads. V-cradle tops, stainless steel, diamond plate, and UHMW.
Pit-Mounted Units - for ground-level applications, requires either a platform with beveled edges or electro-mechanical toe guard. Lifting eyes required for installation and external motor recommended.
Platform with Beveled Edges - welded at 30° angles, increases the standard platform by 4" on all sides.
Electro-Mechanical Toe Guard and Toe Sensor Edge - mounted to the underside of the platform, adds 4" on all sides.
Lifting Eyes - provided for installation and transporting of a unit with a sling or a lifting chain.
Accordion (Bellows) Skirt - designed to cover the scissor leg assembly of the lift table. <i>XL24 Series XL36 Series XL48 series XL60 Series</i> <i>Additional models and portable lifts, contact Sales</i>
Portable / Semi Live Arrangement - Includes two fixed 5" wheels on one side/end (specify side or end mount) and a pull plate with a wheeled dolly handle on the opposite end/side of the base frame. For moving lifts when empty. <i>XL models X3W and X4W models</i> <i>Oversized Platform & other models</i>
Transportable Units - Two rigid and two swivel casters with 6" dia. steel or texite wheels (please specify) and one Presto heavy duty foot operated floor lock. This option adds between 5" and 10-1/4" to the lowered and raised elevation (elevations vary with caster location; consult Sales if the lowered height is critical). <i>models XL24-20, 40, XL36-20, 40</i> <i>models XL48-20, 40, X3W24-20, 40, X3W36-20, 40, X3W48-20, 40</i> <i>models XL60-20, 40, X4W24-20, 40, X4W36-20, 40, X4W48-20, 40</i> <i>models X4.5W-20, 40</i> <i>Capacities above 4000 lbs, models with oversized platforms, and Lift & Tilt models</i>
Flanged or V-Grooved Wheels - 5" steel wheels for Transportable Units only, sold per pair.
Removable Push Handle
Fork Pockets - 6" x 3" or 8" x 3" enclosed steel tube. Specify fork spread when consulting sales. Adds 3" to the lowered and raised elevations when mounted under the base frame.
Super Cycle For high-cycle applications, contact Sales. Components in the base frames have been designed for high-volume, repetitive lifting applications.

Description and Specification
NEMA 1 foot control with Safety Cover and 10' cord (in place of standard hand control)
NEMA 1 wall mount push button, no cord (in place of standard hand control)
NEMA 4 Hand controls and NEMA 4 foot controls
Pedestal-mounted Controls - NEMA 12 controller mounted on a rugged steel stand with momentary push buttons.
Optional Control Voltage - standard control voltage is 115V/1/60, can be upgraded to 24V/1/60 or 24V DC.
Maintained Contact Controls - includes one 3-button wall mount push button station, Up/Down/E-Stop (shipped loose). Price includes upper and lower limit switches.
External / Remote Power Units - all three-phase units include a transformer for low-voltage control, 6' of hose and a mounting stand.
Optional Power Unit Upgrades Convert from 1HP/115V/single phase to 1-1/2HP/230V/460V/3 phase (when selecting the 1-1/2HP 3 phase motor, please specify either a 1 GPM or 1.5 GPM pump) 3HP and 5HP motor/pump options
12V DC & 24V DC Power Units - please specify if a power source is required. These options are available with or without a battery, battery compartment, and charger.
Upper Travel Limit Switch - wired & mounted (N4). Please specify maximum elevation.
Lower Travel Limit Switch - wired & mounted (N4). Please specify minimum lowered elevation.
Velocity Fuse - a safety feature to lock the unit in position in the event of a total hydraulic pressure loss. Price includes upper travel limit switch.
Water Washdown Motor Package (NEMA 4) - Water washdown rated 1HP motor and down valve. Includes oil-tight junction box and control panel 3HP water wash down motor available
Air Power Unit - air motor with hydraulic pump. 1.5 GPM at 80 PSI and 80 CFM of free air with lift fully loaded. Includes a hand or foot control valve (FRL not included) Air filter & lubricator Air limit switch (requires external power unit) mounted and plumbed
Fire-Resistant Hydraulic Fluid - water-glycol fluids are fire-resistant, non-explosive and non-toxic. Approved by Factory Mutual Insurance Engineering Laboratories.
Low Temp or Aircraft Grade hydraulic fluid
Food Grade or Biodegradable hydraulic fluid

Pneumatic Lift Tables

Pneumatic Scissor Lifts

Model Number	Load Capacity	Raised Height	Lowered Height	Vertical Travel	Base Size W / L	Platform Size W / L	Shipping Weight
AX10 Series							
AX10-3648	1000 lbs	29"	8"	21"	36 x 48"	36 x 48"	820 lbs
AX10-4848	1000 lbs	29"	8"	21"	36 x 48"	48 x 48"	890 lbs
AX10-4856	1000 lbs	29"	8"	21"	36 x 48"	48 x 56"	935 lbs
AX10-4860	1000 lbs	29"	8"	21"	36 x 48"	48 x 60"	960 lbs
AX20 Series							
AX20-3648	2000 lbs	32"	8"	24"	36 x 48"	36 x 48"	855 lbs
AX20-4848	2000 lbs	32"	8"	24"	36 x 48"	48 x 48"	915 lbs
AX20-4856	2000 lbs	32"	8"	24"	36 x 48"	48 x 56"	955 lbs
AX20-4860	2000 lbs	32"	8"	24"	36 x 48"	48 x 60"	1040 lbs
AX40 Series							
AX40-4848	4000 lbs	32"	8"	24"	48 x 48"	48 x 48"	1040 lbs
AX40-4856	4000 lbs	32"	8"	24"	48 x 48"	48 x 56"	1115 lbs
AX40-4860	4000 lbs	32"	8"	24"	48 x 48"	48 x 60"	1135 lbs



Features

- 1000 - 4000 lb capacity
- 21" & 24" travel
- 8" lowered height
- 32" raised height
- Air requirements - 80 psi at 15 cfm
- Pressure relief valve standard
- Lifetime warranty on actuator
- Standard pedestal control
- Optional foot control
- Designed for stationary use and must be lagged to the floor
- Custom platforms available
- Hand control is not available on any pneumatic lift/tilts

Heavy-Duty Pneumatic Scissor Lifts

Model Number	Load Capacity	Raised Height	Lowered Height	Vertical Travel	Base Size W / L	Platform Size W / L	Shipping Weight
AXS20 Series							
AXS20-3648	2000 lbs	36"	12"	24"	36 x 48"	36 x 48"	855 lbs
AXS20-4848	2000 lbs	36"	12"	24"	36 x 48"	48 x 48"	915 lbs
AXS20-4856	2000 lbs	36"	12"	24"	36 x 48"	48 x 56"	955 lbs
AXS20-4860	2000 lbs	36"	12"	24"	36 x 48"	48 x 60"	1040 lbs
AXS40 Series							
AXS40-3648	4000 lbs	36"	12"	24"	36 x 48"	36 x 48"	1020 lbs
AXS40-4848	4000 lbs	36"	12"	24"	36 x 48"	48 x 48"	1040 lbs
AXS40-4856	4000 lbs	36"	12"	24"	36 x 48"	48 x 56"	1115 lbs
AXS40-4860	4000 lbs	36"	12"	24"	36 x 48"	48 x 60"	1135 lbs
AXS60 Series							
AXS60-4848	6000 lbs	36"	12"	24"	48 x 48"	48 x 48"	1170 lbs
AXS60-4856	6000 lbs	36"	12"	24"	48 x 48"	48 x 56"	1315 lbs
AXS60-4860	6000 lbs	36"	12"	24"	48 x 48"	48 x 60"	1335 lbs
AXS80 Series							
AXS80-4848	8000 lbs	36"	12"	24"	48 x 48"	48 x 48"	1340 lbs
AXS80-4856	8000 lbs	36"	12"	24"	48 x 48"	48 x 56"	1415 lbs
AXS80-4860	8000 lbs	36"	12"	24"	48 x 48"	48 x 60"	1435 lbs



Features

- 2000 - 8000 lb capacity
- 24" travel
- 36" raised heights
- Air requirements are 80 psi at 15 cfm
- Lifetime warranty on actuator
- Pressure relief valve standard
- Standard pedestal control
- Optional foot control
- Transportable version available
- No floor lagging necessary
- Custom platforms available

Pneumatic options on page 30

Pneumatic Lift & Tilt

Pneumatic Scissor Lift & Tilt

Model Number	Load Capacity	Raised Height	Lowered Height	Degree of Tilt	Vertical Travel	Base Size W / L	Platform Size W / L	Shipping Weight
AXT10 Series								
AXT10-3648	1000 lbs	36"	15"	30°	21"	36 x 48"	36 x 48"	1190 lbs
AXT10-4848	1000 lbs	36"	15"	30°	21"	36 x 48"	48 x 48"	1300 lbs
AXT10-4856	1000 lbs	36"	15"	30°	21"	36 x 48"	48 x 56"	1390 lbs
AXT10-4860	1000 lbs	36"	15"	30°	21"	36 x 48"	48 x 60"	1440 lbs
AXT20 Series								
AXT20-3648	2000 lbs	39"	15"	30°	24"	36 x 48"	36 x 48"	1365 lbs
AXT20-4848	2000 lbs	39"	15"	30°	24"	36 x 48"	48 x 48"	1395 lbs
AXT20-4856	2000 lbs	39"	15"	30°	24"	36 x 48"	48 x 56"	1450 lbs
AXT20-4860	2000 lbs	39"	15"	30°	24"	36 x 48"	48 x 60"	1540 lbs
AXT40 Series								
AXT40-4848	4000 lbs	39"	15"	30°	24"	48 x 48"	48 x 48"	1540 lbs
AXT40-4856	4000 lbs	39"	15"	30°	24"	48 x 48"	48 x 56"	1595 lbs
AXT40-4860	4000 lbs	39"	15"	30°	24"	48 x 48"	48 x 60"	1635 lbs



Features

- 1000 - 4000 lb capacity
- 21" & 24" vertical travel
- 30° tilt
- Standard pedestal control
- Optional foot control
- Air requirements are 80 psi at 15 cfm
- Pressure relief valve standard
- Lifetime warranty on actuator
- Designed for stationary use and must be lagged to the floor
- Custom designs available
- 35° & 45° tilt available, please contact Sales

Heavy-Duty Pneumatic Scissor Lift & Tilt

Model Number	Load Capacity	Raised Height	Lowered Height	Degree of Tilt	Vertical Travel	Base Size W / L	Platform Size W / L	Shipping Weight
AXST20 Series								
AXST20-3648	2000 lbs	43"	19"	30°	24"	36 x 48"	36 x 48"	1200 lbs
AXST20-4848	2000 lbs	43"	19"	30°	24"	36 x 48"	48 x 48"	1320 lbs
AXST20-4856	2000 lbs	43"	19"	30°	24"	36 x 48"	48 x 56"	1460 lbs
AXST20-4860	2000 lbs	43"	19"	30°	24"	36 x 48"	48 x 60"	1540 lbs
AXST40 Series								
AXST40-3648	4000 lbs	43"	19"	30°	24"	36 x 48"	36 x 48"	1450 lbs
AXST40-4848	4000 lbs	43"	19"	30°	24"	36 x 48"	48 x 48"	1570 lbs
AXST40-4856	4000 lbs	43"	19"	30°	24"	36 x 48"	48 x 56"	1690 lbs
AXST40-4860	4000 lbs	43"	19"	30°	24"	36 x 48"	48 x 60"	1770 lbs
AXST60 Series								
AXST60-4848	6000 lbs	43"	19"	30°	24"	48 x 48"	48 x 48"	1660 lbs
AXST60-4856	6000 lbs	43"	19"	30°	24"	48 x 48"	48 x 56"	1780 lbs
AXST60-4860	6000 lbs	43"	19"	30°	24"	48 x 48"	48 x 60"	1860 lbs
AXST80 Series								
AXST80-4848	8000 lbs	43"	20"	30°	23"	48 x 48"	48 x 48"	1735 lbs
AXST80-4856	8000 lbs	43"	20"	30°	23"	48 x 48"	48 x 56"	1850 lbs
AXST80-4860	8000 lbs	43"	20"	30°	23"	48 x 48"	48 x 60"	1930 lbs



Shown with optional lip

Features

- 2000 - 8000 lb capacity
- 24" travel
- 30° tilt
- Air requirements are 80 psi at 15 cfm
- Pressure relief valve standard
- Lifetime warranty on actuator
- Standard pedestal control
- Optional foot control
- Custom designs available
- 35° & 45° tilt available, please contact Sales

Pneumatic options on page 30

Tel: 800-343-9322

Pneumatic Lift & Rotate

Pneumatic Scissor Lift & Rotate



Shown with optional accordion skirting

Model Number	Load Capacity	Raised Height	Lowered Height	Vertical Travel	Base Size W / L	Platform Size W / L	Shipping Weight
AXR10 Series							
AXR10-3648	1000 lbs	32"	11"	21"	36 x 48"	36 x 48"	1055 lbs
AXR10-4848	1000 lbs	32"	11"	21"	36 x 48"	48 x 48"	1185 lbs
AXR10-4856	1000 lbs	32"	11"	21"	36 x 48"	48 x 56"	1280 lbs
AXR10-4860	1000 lbs	32"	11"	21"	36 x 48"	48 x 60"	1320 lbs
AXR20 Series							
AXR20-3648	2000 lbs	35"	11"	24"	36 x 48"	36 x 48"	1155 lbs
AXR20-4848	2000 lbs	35"	11"	24"	36 x 48"	48 x 48"	1295 lbs
AXR20-4856	2000 lbs	35"	11"	24"	36 x 48"	48 x 56"	1385 lbs
AXR20-4860	2000 lbs	35"	11"	24"	36 x 48"	48 x 60"	1450 lbs
AXR40 Series							
AXR40-4848	4000 lbs	35"	11"	24"	48 x 48"	48 x 48"	1420 lbs
AXR40-4856	4000 lbs	35"	11"	24"	48 x 48"	48 x 56"	1550 lbs
AXR40-4860	4000 lbs	35"	11"	24"	48 x 48"	48 x 60"	1595 lbs

Features

- 1000 - 4000 lb capacity
- 21" & 24" vertical travel
- Turntable
- Standard pedestal control
- Optional foot control
- Pressure relief valve standard
- Lifetime warranty on actuator
- Air requirements are 80 psi at 15 cfm
- Designed for stationary use
- Optional turret bearing
- Custom designs available

Heavy-Duty Pneumatic Scissor Lift & Rotate

Model Number	Load Capacity	Raised Height	Lowered Height	Vertical Travel	Base Size W / L	Platform Size W / L	Shipping Weight
AXS20 Series							
AXSR20-3648	2000 lbs	39"	15"	24"	36 x 48"	36 x 48"	1155 lbs
AXSR20-4848	2000 lbs	39"	15"	24"	36 x 48"	48 x 48"	1295 lbs
AXSR20-4856	2000 lbs	39"	15"	24"	36 x 48"	48 x 56"	1385 lbs
AXSR20-4860	2000 lbs	39"	15"	24"	36 x 48"	48 x 60"	1450 lbs
AXS40 Series							
AXSR40-3648	4000 lbs	39"	15"	24"	36 x 48"	36 x 48"	1370 lbs
AXSR40-4848	4000 lbs	39"	15"	24"	36 x 48"	48 x 48"	1420 lbs
AXSR40-4856	4000 lbs	39"	15"	24"	36 x 48"	48 x 56"	1550 lbs
AXSR40-4860	4000 lbs	39"	15"	24"	36 x 48"	48 x 60"	1595 lbs
AXS60 Series							
AXSR60-4848	6000 lbs	39"	15"	24"	48 x 48"	48 x 48"	1620 lbs
AXSR60-4856	6000 lbs	39"	15"	24"	48 x 48"	48 x 56"	1750 lbs
AXSR60-4860	6000 lbs	39"	15"	24"	48 x 48"	48 x 60"	1795 lbs
AXS80 Series							
AXSR80-4848	8000 lbs	39"	15"	24"	48 x 48"	48 x 48"	1720 lbs
AXSR80-4856	8000 lbs	39"	15"	24"	48 x 48"	48 x 56"	1850 lbs
AXSR80-4860	8000 lbs	39"	15"	24"	48 x 48"	48 x 60"	1895 lbs



Features

- 2000 - 8000 lb capacity
- 24" travel
- Turntable
- Air requirements are 80 psi at 15 cfm
- Lifetime warranty on actuator
- Optional turret bearing
- Pressure relief valve standard
- Standard pedestal control
- Optional foot control
- Transportable version available
- No floor lagging necessary
- Oversized turntables available
- Custom designs available

Pneumatic options on page 30

Pneumatic Tilt Tables

Pneumatic Tilt Tables



Model Number	Load Capacity	Lowered Height	Base Size W / L	Platform Size W / L	Shipping Weight
AT10 Series					
AT10-3648	1000 lbs	7"	36 x 48"	36 x 48"	640 lbs
AT10-4848	1000 lbs	7"	36 x 48"	48 x 48"	700 lbs
AT10-4856	1000 lbs	7"	36 x 48"	48 x 56"	750 lbs
AT10-4860	1000 lbs	7"	36 x 48"	48 x 60"	770 lbs
AT20 Series					
AT20-3648	2000 lbs	7"	36 x 48"	36 x 48"	690 lbs
AT20-4848	2000 lbs	7"	36 x 48"	48 x 48"	770 lbs
AT20-4856	2000 lbs	7"	36 x 48"	48 x 56"	835 lbs
AT20-4860	2000 lbs	7"	36 x 48"	48 x 60"	855 lbs
AT40 Series					
AT40-4848	4000 lbs	7"	36 x 48"	48 x 48"	795 lbs
AT40-4856	4000 lbs	7"	36 x 48"	48 x 56"	850 lbs
AT40-4860	4000 lbs	7"	36 x 48"	48 x 60"	880 lbs
AT60 Series					
AT60-4848	6000 lbs	7"	48 x 48"	48 x 48"	890 lbs
AT60-4856	6000 lbs	7"	48 x 48"	48 x 56"	970 lbs
AT60-4860	6000 lbs	7"	48 x 48"	48 x 60"	1040 lbs

Features

- 2000 - 6000 lb capacity
- Air requirements are 80 psi at 15 cfm
- Standard pedestal control
- Foot control available
- Optional floor stand available
- Pressure relief valve standard
- Optional fork pockets
- Lifetime warranty on actuator
- Optional motion stabilizer
- Custom designs available
- Restraining chain to guard against over-tilt
- 35° & 45° tilt available, please contact Sales

Pneumatic Options

Mechanical Options

Description and Specification
Oversized Platform - platforms can be increased in width and length up to an additional 24". Side and end-load capacities are de-rated 2% per inch of increase and oversized models must be lagged to the floor.
Platform with Beveled Edges - welded at 30° angles, beveled edges increase the standard platform by 4" on all sides.
Optional Platforms & Overlay material - for special handling of loads: V-cradle tops, stainless steel, diamond plate, and UHMV
Lifting Eyes - provided for installation and transportation of unit with a sling or a lifting chain.
Accordion (Bellows) Skirts - vinyl, alternating black & yellow 3" pleats. Encloses the base and leg assembly. AX10, AX20, AXR10, AXR20, AXS20, AXS40, AXSR20, AXSR40 AX40, AXR40, AXS60, AXS80, AXSR60, AXSR80 AT10, AT20, AT40 AXT10, AXT20, AXST20, AXST40 AXT40, AXST60, AXST80 Other models, please contact Sales.
Portable / Semi Live Arrangement - includes two fixed 5" wheels on one end/side (specify side or end mount) and a pull plate with wheeled dolly handle on the opposite end/side of the base frame. For moving lifts when empty. AXS20, AXS40, AXS60 Models with oversized platforms Tilt and Lift & Tilt models Other models, please contact Sales.
V-Grooved Wheels - 5" steel wheels for transportable units only, sold per pair.

Description and Specification
Transportable Units - Two rigid and two swivel casters with 6" diameter steel or texite wheels and one Presto heavy duty foot operated floor lock. This option adds between 5" and 10-1/4" to the lowered and raised elevations (depending on the positioning of the casters). AXS20, AXS40, AXS60 Models with oversized platforms Tilt and Lift & Tilt models Other models, please contact Sales
Removable Push Handle
Fork Pockets - 6" x 3" or 8" x 3" enclosed steel tube. Specify fork spread when consulting Sales. Adds 3" to the lowered and raised elevations when mounted under the base frame. AXS Heavy Duty series lifts only Tilt and Lift & Tilt models, contact Sales.
Floor Stands - designed to increase the lowered height of tilters. Please specify desired elevation.
Motion Stabilizer - reduces the bounce found in pneumatic tilt tables.
Turntable Options for AXR and AXSR series lifts 180° spring position detents 90° spring position detents 90° positive locking positioner Turret-style bearing is available for heavier loads and larger sizes
Foot Controlled Pneumatic Valve (in place of standard pedestal mounted valve) AT, AX, AXR, AXS, & AXSR series AXT and AXST Dual Foot Controls

Tel: 800-343-9322

Select a Scissor Lift

Guidelines for Scissor Lifts

Vertical Travel

Determine the maximum raised height requirements to select the vertical travel of a unit.

Load Capacity and Side/End Loading Capacities

Load capacity is the amount of weight of an evenly balanced and centered load. Side/End capacity is the weight of the load over the edge when the lift is in a fully raised position (often less than the balanced load capacity).

Power Supply

Single-phase 1 HP motor or three-phase 1-1/2 HP motor is standard as shown (not available on XS series units).

Upon request, motors can be interchanged.

External, remote, and air motors are also available, please contact Sales.

Frequency and Speed of Operation

The standard motor is rated for intermittent duty. If usage is more than one full lift every four minutes, or jogging action every 10 seconds, the motor will overheat. Optional external power units are available, as well as for increased lifting speed.

Lowered Height

For a lower than standard height, pit-mounted units (ground level) are available.

Pit mounted units must have beveled platform edges or electromechanical toe guards to conform to OSHA recommendations.

Toe guards extend the length and the width of a standard platform by 8".

Lifting eyes are also required for installation.

Platforms

Standard platform sizes conform to standard base sizes.

Platform sizes may be widened and/or lengthened up to an additional 24".

Platforms with beveled edges increase the standard platform size by 4" on each side.

Side/End capacity is derated by 2% per inch on all oversized platforms.

Portability

Portability packages are used to move empty lifts. They include 2 steel wheels, side or end mounted, with a wheeled dolly. Please contact Sales if you are looking to add a portability package to a unit with an oversized platform.

Transportability packages are used to move lifts carrying a load. They include 2 fixed and 2 swivel casters.

Electric Controls

Push-button, hand-held controls (NEMA 12) with an 8' cord is standard.

Optional foot-operated up/down controls with safety covers, wall-mounted controls (NEMA 4), and pedestal mounted controls with a NEMA 12 push-button enclosure are available. Please contact Sales.

Other Options

- Stainless steel skin or diamond plate top material
- Conveyor tops
- Turntables
- Ball transfer platforms
- Accordion (bellows) skirts
- Non-flammable and low temperature hydraulic fluid
- Wash down units
- Adjustable flow control valves
- Fork pockets



Presto Lifts Sales Policies

Pricing Policy

Presto Lifts' prices are subject to change without notice. Presto Lifts also reserves the right to alter product specifications, designs and shipping weight without prior notice. The customer service/sales staff is available to provide written quotations for all standard products, modification options or specialty engineered products.

Credit Policy

Standard terms of payment are net 30 days from the date of invoice with approved credit. Terms for specialty designed products are 1/3 nonrefundable payment with the order and 2/3 payment net 30 days from date of invoice. New dealers may be required to prepay their first order prior to shipment. Presto Lifts will not release any orders to dealers who have an outstanding balance over 60 days. Presto Lifts reserves the right to charge a 1-1/2% late charge on outstanding balances over 30 days.

Shipping Policy

All products are shipped F.O.B. Factory, Manila, AR 72442. Freight charges will be "Third Party Bill" by carrier, unless freight collect is specified. Parts orders weighing 70 lbs or less will ship via UPS ground, pre-pay & add, unless otherwise requested. Parts orders greater than 70 lbs will be shipped common carrier. Published shipping weights may fluctuate due to options and/or packaging material.

Presto Lifts is not responsible for loss or damage in transit. It is the responsibility of the receiver (consignee) to inspect for damage, and file claims against the carrier. Presto Lifts will assist consignee whenever possible in filing for claims.

Limited Warranty Policy

Presto Lifts warrants all of its products (excluding PowerStak) against defects in the welded structural frame and, if applicable, scissor legs from faulty material and workmanship for a period of five years from the date of invoice.

A lifetime limited warranty is provided for the Airstroke Actuator™ in all pneumatic lifts against any defect due to faulty material or workmanship. All batteries are covered under a separate limited warranty from the battery manufacturer for a period of one year from the date of invoice. All other components have a limited warranty against defects in faulty material and workmanship for a two year period from the date of invoice and 30 day limited warranty on labor. Please note that prior authorization from Presto Lifts is required on all warranty work.

There are no implied warranties of any kind, more specifically, there are no warranties of merchantability or fitness for any particular purpose. Presto Lifts' sole warranty shall be as set forth in this limited warranty.

Presto Lifts will elect to repair or replace a defective component without charge, if any components should become defective within the limited warranty period. Proof of purchase is required for warranty. The charge for shipping the defective component is the responsibility of the buyer and must be accompanied with an RGA number. The shipping charge to return the component to the buyer is the responsibility of Presto Lifts, Inc. This limited warranty does not cover labor expense for removal or reinstallation of components after thirty days.

This limited warranty shall not cover, among other things: damages resulting from foreign matter or water, failure to provide reasonable and necessary maintenance, and if applicable, use of product while charger is plugged into an AC outlet, or failure to follow operating instructions. The limited warranty is not valid for damage resulting from negligence, accident, unreasonable use, abuse, or misuse, exceeding data plate capacities or

Return Goods Authorization Policy

Presto Lifts provides the Return Goods Authorization (RGA) Policy, for specific models, as a courtesy to our distributors in the event they do not receive what they ordered. If a customer wishes to return a Presto Lifts product, please contact the Customer Service Department and request an RGA number. This request must be made on or before the fifteenth calendar day following the date of Presto Lifts' invoice for the merchandise. Not all units are returnable. Quantity orders and special designs cannot be returned under any circumstances. Presto Customer Service reserves the right for final judgement on all product returns.

Order Change Policy

If a purchase order for standard or modified product is changed within one calendar day after the receipt of the purchase order, there will be no charge. If a change is required from the second calendar day following the receipt of the purchase order, a surcharge will be added. In the event that material unique to the purchase order has been purchased or manufactured, regardless of the time frame, and a change is required that eliminates the need for the purchased or manufactured material, the cost of the material as well as a surcharge will be added to the purchase order.

Cancellation Policy

All cancellations of purchase orders may be subject to a cancellation fee depending upon the stage of production. In the event that material unique to the purchase order has been purchased or manufactured, regardless of the time frame, and a cancellation is required that eliminates the need for the purchased or manufactured material, the cost of the material as well as a surcharge will be added to the purchase order. If a cancellation is received on the day of shipment, Presto Lifts restocking policy will apply. Cancellation of custom engineered products will result in forfeiture of deposit plus any additional applicable fees.

Restocking Policy

Presto Lifts' goal is for you to be satisfied with your order. At the discretion of Presto Customer Service, standard merchandise may be returned but is subject to a restocking fee. Before returning any products, please review the Return Goods Authorization Procedures and contact the customer service department for instructions.

altering the product without Presto Lifts authorization. Presto Lifts expressly disclaims and excludes any liability for consequential, incidental, indirect or punitive damages or financial loss to people or property resulting from any breach of warranty or the operation or failure of this product.

Presto Lifts makes no representation that this product complies with local, state, or federal safety/product standards codes. Should this product fail to comply in any way with those codes, it shall not be considered a defect of materials or workmanship. Presto Lifts shall not be held liable for any damages resulting from noncompliance. It is the dealer's responsibility to exercise this limited warranty. This limited warranty is provided to the original purchaser (defined as the original end user) and is nontransferable. This constitutes the complete and final agreement involving Presto Lifts and limited warranty obligations for products.

PowerStak Warranty Policy

Presto Lifts warrants the PowerStak against defects in the welded structural frame and AC motors on lifts equipped with an AC power unit from faulty material and workmanship for a period of one (1) year from the date of invoice.

Presto Lifts warrants the PowerStak against defects in the mast, fork carriage, chains, pumps, DC motors, controllers, cylinders, and wiring harnesses from faulty material and workmanship for a period of one (1) year from the date of invoice.

All wear items such as batteries, wheels, motor brushes, seals, bearings, hydraulic hoses, all switches, battery chargers, and forks have a limited warranty against defects in faulty material and workmanship for a ninety (90) day period from the date of invoice and a thirty (30) day limited warranty on labor. Please note that prior authorization from Presto Lifts is required for all warranty work.

The RGA number must appear on the outside of any packaging material for a return to be accepted and processed by Presto Lifts. Customers shipping returns from the Continental US, Canada, or Mexico have thirty (30) days from date of RGA issue to have the product arrive at Presto Lifts' facility. All merchandise must arrive Free on Board at Presto Lifts' facility or the shipment will be refused and returned to the sender. All credits are issued less restocking and refurbishing charges, regardless if the merchandise was damaged in transit.

Glossary of Terms

Accordion Skirting (Bellows): A device attached to the lift table platform that covers the internal components of a lift table.

Airbag: A pneumatic device used to raise and lower a lift table.

Axle Load: A dynamic load which is applied to the edge of a lift platform in any raised position.

Base Frame: The bottom component of a scissor lift table.

Bevel Toe Guard: A plate mounted flush with the vertical edge of the platform and slanted inwardly to eliminate a shear point when a lift table is pit mounted.

Control: A device used to regulate the function of a unit.

Cylinder: A device that converts fluid power into linear force and motion.

Electric Toe Guard: A device mounted below the platform such that when an obstruction is met during descent, the lift will be brought to rest before entrapment can occur.

End/Side Edge Load Capacity: The maximum amount of static load that can be applied to the edge of the platform (end or side) when the lift is in any raised position.

Hinged Bridge: A hinged transition plate which is attached to the edge of the platform and used to bridge the gap between the platform and the landing and/or truck bed.

Lifting Capacity: The rated load of a scissor lift applied as a uniformly distributed load.

Limit Switch: An electro/mechanical device used to locate a lift table platform at a specific height.

Load Center: The horizontal distance from the back of the forks or platform to the center of gravity of the load being lifted.

Lowered Height: The height of the platform in the fully retracted position.

Maintenance Device (Safety Chock): A device used to secure the lift in a raised position while routine maintenance or service is being performed.

Platform: The top component of a lift table.

Platform Ends: The edges of the platform that are perpendicular to the scissor legs. The end dimension is considered the platform width.

Platform Sides: The edges of the platform that are parallel to the scissor legs. The side dimension is considered the platform length.

Portability Set: A device used to move or relocate an empty lift. Lift equipped with 2 fixed wheels, pull plate and 'T' handle.

Power Unit: An integral power supply unit usually containing a pump, motor (air or electric), reservoir, relief valve, and directional control.

Rated Capacity: The maximum load which can be applied according to the manufacturer's specification.

Rated Load: The maximum capacity as specified by the equipment nameplate.

Raised Height: The maximum height of the platform deck when a unit is in the fully extended position.

Rollover Capacity: The maximum amount of single axle load which may be rolled over the platform surface when the lift is in lowered position.

Scissor Lift: A raising/lowering device that is supported or stabilized by one or more sets of pantograph leg sections.

Stacker: A manually maneuvered device that is used to raise or lower a product to a specific elevation. The vertical action can be either powered or manual.

Tilter: A device used to position product by tilting to a specific angle.

Transport Set: A device used to move or relocate a loaded lift. Lift equipped with four (4) casters.

Turntable: A device used to position product by turning to a specific location.

Vertical Creep: Extremely slow speed movement of a scissor lift that is the result of normal, internal settling of fluid control valves.

Vertical Travel: The difference between the fully raised height of the platform deck and the fully lowered height of the platform deck.

Over 65 Years of Innovation


Since 1944, Presto Lifts, Inc. has been creating precision hydraulic equipment that improves safety and productivity.

In 1977, Presto Lifts began producing a full line of manually propelled lifts and stackers under the name brand of Presto. 1990 saw the introduction of the scissor lift table for in-plant applications. Presto Lifts now offers more than 500 different models of Presto brand Lifts, Tables and Tilters -- more than any other company in the world.

All Presto Lifts products are put through a rigorous 110% capacity testing before shipment, to ensure our high quality standards are achieved. If service is required, all standard replacement parts are carried in stock and are shipped within 24 to 48 hours. To further attest to our commitment to quality, Presto Lifts provides an industry best 5 year structural and 2 year component warranty on most models. For specific warranty information, please see policies printed inside this catalog.

All products exceed ANSI MH29.1, ANSI MH29.2 and B56.10 standards. Presto Lifts also offers an AIS Program. In this program our most popular products are Always In Stock and ship in seven days or less! Providing quick turnaround on our more popular items has allowed our dealers to better serve their customers. In many cases an end user will identify a need and within days the solution is on site.

With a dedication to growth, Presto Lifts is positioned to continue developing new products that will further define the material handling industry.

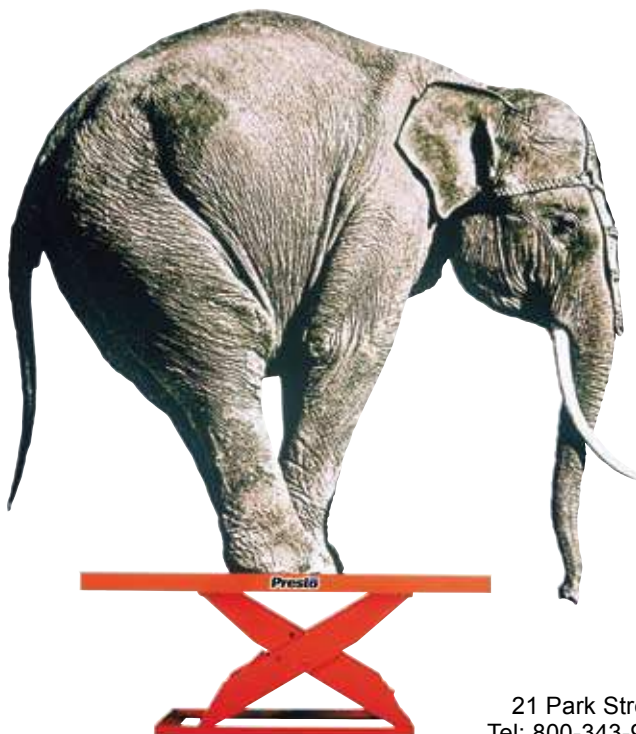

Distributed by:

Presto Lifts Inc.
www.prestolifts.com
21 Park Street • Attleboro, MA 02703
Tel: 800-343-9322 • Fax: 888-788-6496

Presto LIFTS